


Weathering Data for Plexiglas® V045i/V052i

Plexiglas® V052i/V045i resin provides outstanding transparency and UV resistance during long-term outdoor exposure. Typical weathering characteristics of Plexiglas V052i/V045i colorless acrylic exposed in Florida and Arizona are presented below.

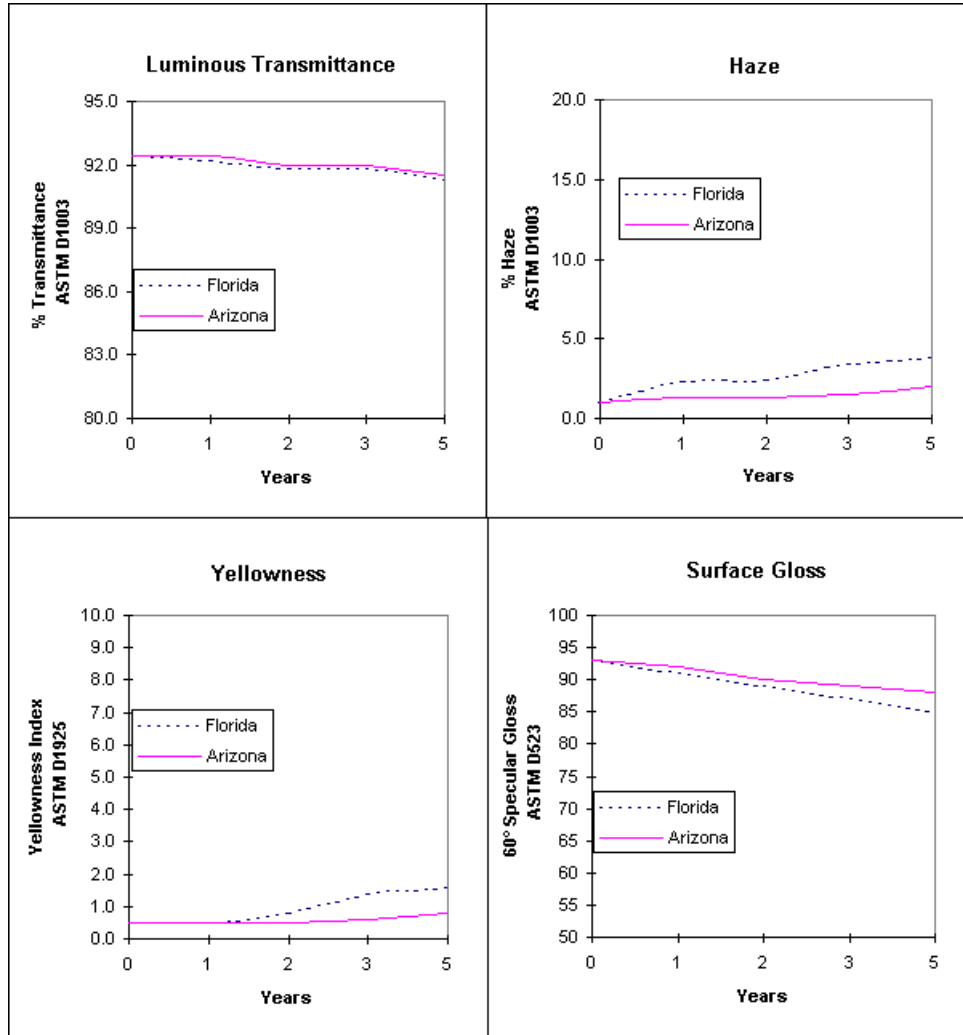

Plexiglas® acrylic plastic is a combustible thermoplastic. Observe fire precautions appropriate for comparable forms of wood and paper. For building uses, check code approvals. Impact resistance is a factor of thickness. Avoid exposure to heat or aromatic solvents. Clean with soap and water. Avoid abrasives.

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Arkema expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.

See MSDS for Health & Safety Considerations.

We manufacture and market PMMA resin and sheet products under the brand name Plexiglas® in North and Latin America, and under the brand name Altuglas® in Asia Pacific, Europe, Africa and the Middle East. Altuglas® and Plexiglas®, Solarkote®, are registered trademarks of Arkema.